


WELBRO
PIPE & COUPLING

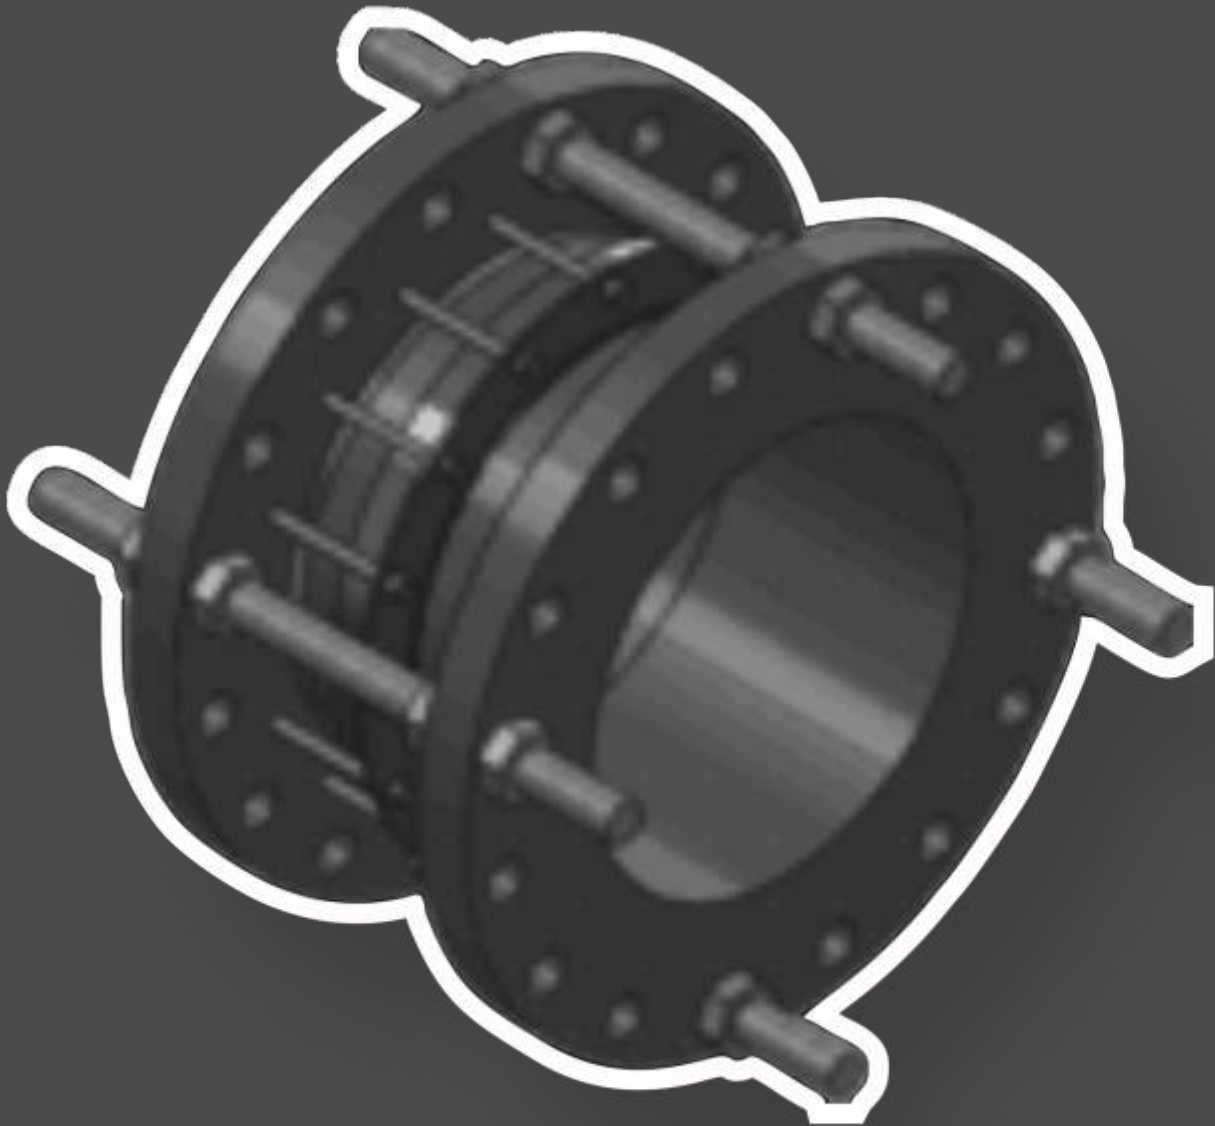

RESTRAINED FLANGE ADAPTERS TECHNICAL DATA

1. End Rings:

- Mild Steel to BS EN 10025:2004 or Grade CQ

2. Adapter Body:

- Mild Steel to BS EN 10025:2004 or Grade CQ
- Flanges: SABS 1123

3. Spigot:

- Spigot - Steel to SANS 1431 Grade 300WA

4. Rubber Gasket:

- EPDM Grade E to BS 2494 1990 or SANS974 Related ISO4633


5. Studs / Tierods:

- Studs: Stainless Steel Grade 304
- Tierods: Steel to BS970 Grade 070 or Steel to SANS1143 Grade 8.8

6. Coating:

- Fusion Bonded Epoxy to SABS 1217 to a minimum thickness of 250 microns or client specifications
- Mild Steel Bolts are hot dip galvanised to SANS 763

RESTRAINED FLANGE ADAPTER (RFA) - GENERAL ARRANGEMENT DRAWING

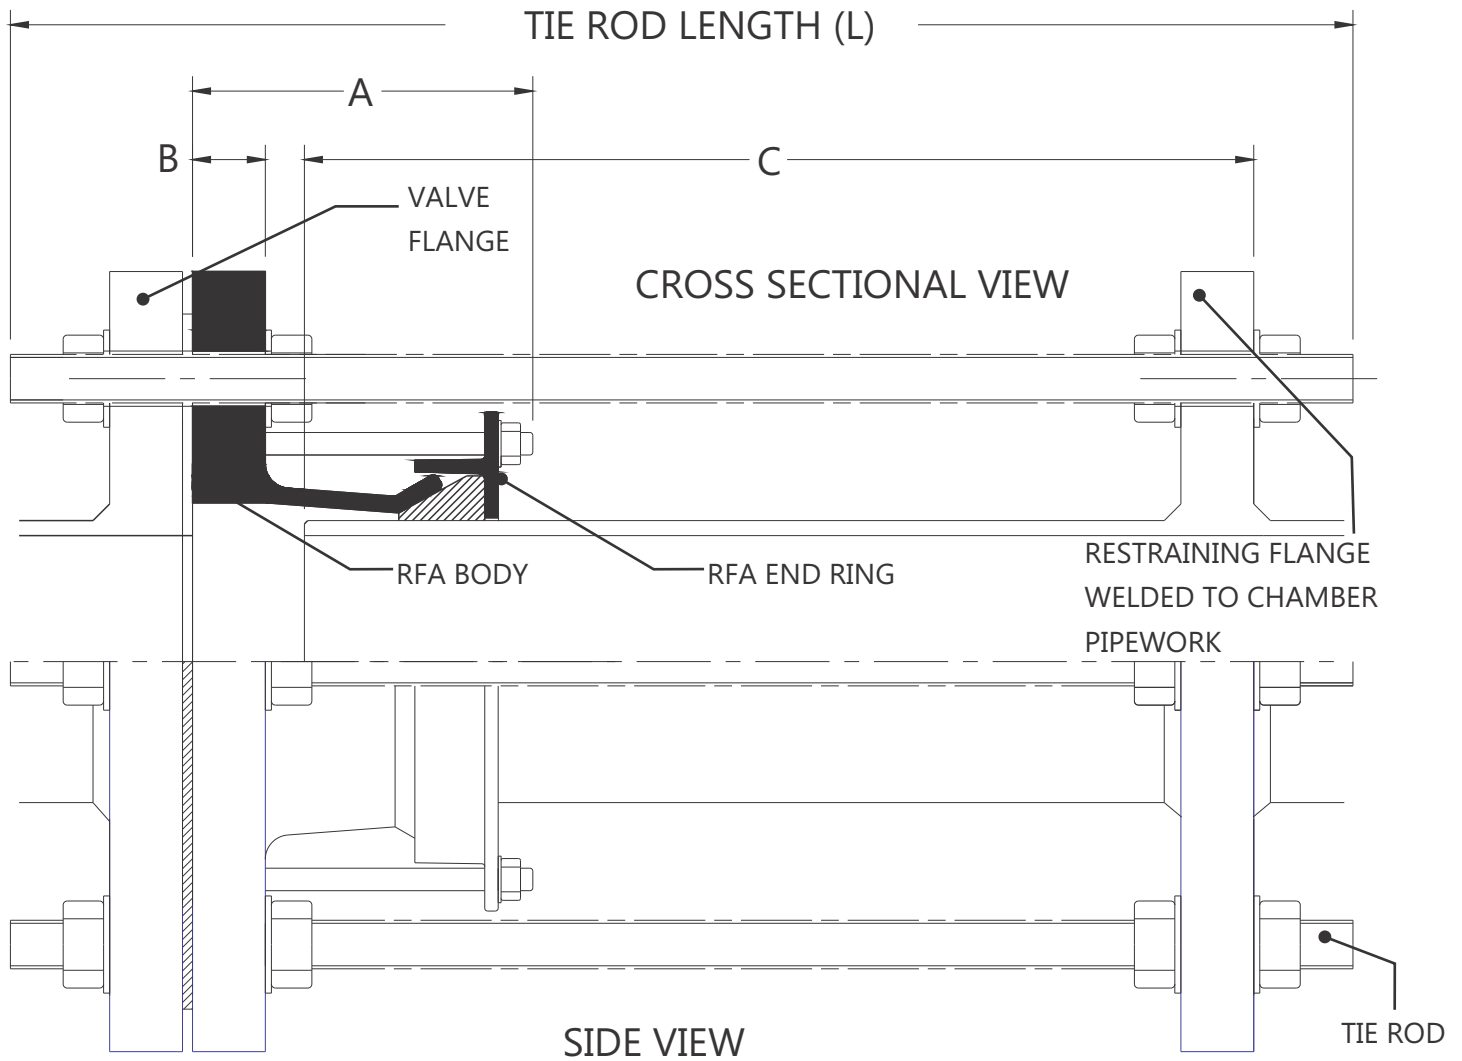

RESTRAINED FLANGE ADAPTER (RFA) - TABLE OF DIMENSIONS

HDG FASTENERS										
NB	Coupling		Product Code	Flange			Total Length	Tie Rod Detail		
	ID	Range		Size	Thick	OD		Nr	Diam	L
65	68	57 - 66	WBR0650x050T1000/1600	50	12	165	137	2	M16	310
			WBR0650x050T2500/4000	50	20	165	145	2	M16	310
70	81	63 - 79	WBR0700x065T1000/1600	65	12	185	137	2	M16	310
			WBR0700x065T2500/4000	65	22	185	147	2	M16	310
75	95	80 - 93	WBR0750x080T1000/1600	80	14	200	139	2	M16	310
			WBR0750x080T2500/4000	80	22	200	147	2	M16	330
100	121	98 - 108	WBR1000x100T1000/1600	100	14	220	139	2	M16	310
			WBR1000x100T2500/4000	100	22	250	147	2	M20	330
125	156	132 - 154	WBR1250x125T1000/1600	125	16	250	141	2	M16	320
			WBR1250x125T2500/4000	125	28	270	153	2	M24	350
150	173.5	150 - 170	WBR1500x150T1000/1600	150	18	285	143	2	M20	330
			WBR1500x150T2500/4000	150	30	300	155	2	M24	360
200	225	210 - 223	WBR2000x200T1000	200	24	340	154	4	M20	360
			WBR2000x200T1600	200	26	340	156	4	M20	360
			WBR2000x200T2500	200	32	360	162	4	M24	390
			WBR2000x200T4000	200	36	375	166	4	M24	390
250	280	268 - 278	WBR2500x250T1000	250	20	395	150	4	M20	360
			WBR2500x250T1600	250	25	405	155	4	M24	380
			WBR2500x250T2500	250	30	425	160	4	M24	390
			WBR2500x250T4000	250	38	450	168	4	M30	420
300	330	315 - 328	WBR3000x300T1000	300	22	445	152	4	M20	370
			WBR3000x300T1600	300	28	460	158	4	M24	420
			WBR3000x300T2500	300	32	485	162	4	M24	430
			WBR3000x300T4000	300	40	515	170	4	M30	430
350	363	344 - 360	WBR3500x350T1000	350	25	505	165	4	M20	420
			WBR3500x350T1600	350	30	520	170	4	M24	430
			WBR3500x350T2500	350	35	555	175	4	M24	410
			WBR3500x350T4000	350	45	580	185	4	M30	460

RESTRAINED FLANGE ADAPTER (RFA) - TABLE OF DIMENSIONS

HDG FASTENERS										
NB	Coupling		Product Code	Flange			Total Length	Tie Rod Detail		
	ID	Range		Size	Thick	OD		Nr	Diam	L
400	413	391 - 410	WBR4000x400T1000	400	25	565	165	4	M24	410
			WBR4000x400T1600	400	35	580	175	4	M24	430
			WBR4000x400T2500	400	40	620	180	4	M30	450
			WBR4000x400T4000	400	50	660	190	4	M30	470
450	463	444 - 460	WBR4500x450T1000	450	30	615	170	4	M24	440
			WBR4500x450T1600	450	40	640	180	4	M24	460
			WBR4500x450T2500	450	45	670	185	4	M30	480
			WBR4500x450T4000	450	60	685	200	4	M30	510
500	513	494 - 510	WBR5000x500T1000	500	32	670	172	4	M24	450
			WBR5000x500T1600	500	40	715	180	4	M30	490
			WBR5000x500T2500	500	50	730	190	4	M30	510
			WBR5000x500T4000	500	70	755	210	4	M36	570
600	620	606 - 616	WBR6000x600T1000	600	38	780	178	4	M24	530
			WBR6000x600T1600	600	50	840	190	4	M30	570
			WBR6000x600T2500	600	60	845	200	4	M36	600
			WBR6000x600T4000	600	84	890	224	4	M45	670

While every effort has been made to ensure that the information in this document is correct and accurate at the time of publishing, WELBRO assumes no responsibility or liability for typographical errors or omissions or of for any misinterpretation of the information contained within the publication and reserves the right to change any information contained herein without notice.

Users of any WELBRO product or information within this document must make their own assessment of suitability for their particular application. Product dimensions are nominal only, and should be verified if critical to a particular installation. No warranty is either expressed, implied, or statutory made by WELBRO unless expressly stated in any sale and purchase agreement entered into between WELBRO and the user.



CONTACT DETAILS

Sales and Distribution

Office: + 27 10 065 1660

Email: sales@welbropipe.co.za

Physical Address

Corner of

Buite and Jacoba Street

Alberton North

Website

www.welbropipe.co.za